

Fork Positioners Model FFP



The Bolzoni Auramo FFP model fork positioner provides fast and accurate fork positioning as FEM/ITA fork carriers sliding on a chromed bar in order to use the standard forks on the truck with no modification. Visibility strength and versatility are unchanged.

The forks carriers show an oversized structure and consequently this model can be considered the "heavy duty" version of the FR model.



Also available in non sideshift version, FFN model.



Fork Positioners

Sideshifting fork positioners with bar mounted fork carriers

Models FFP

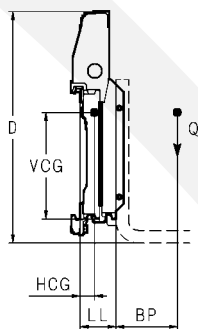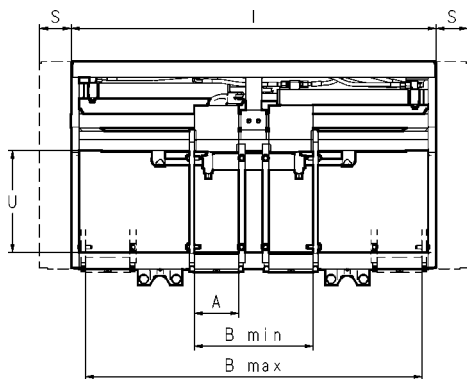

- Separate sideshift.
- Same features as corresponding FP... models, but with ISO 2328 / FEM / ITA fork carriers.
- Standard forks of the truck can be used without modification.
- Fork carriers sliding on a chromed bar with bushings.
- Excellent visibility, strength and versatility.
- Accurate fork movement as the fork carriers move on a round chromed bar.

| Model | Capacity | Load Centre | Opening Range | Frame Width | Minimum Carriage Width | Height | Weight | Centre of Gravity Horizontal | Centre of Gravity Vertical | Effective Thickness | Support Width | Side Visibility | Mounting Class |
|----------|----------|-------------|---------------|-------------|------------------------|---------|---------|------------------------------|----------------------------|---------------------|---------------|-----------------|----------------|
| | Q kg | BP mm | B mm | I mm | FL mm | D mm | W kg | HCG mm | VCG mm | LL mm | A mm | U mm | ISO 2328 |
| FFP25X9A | 2500 | 500 | 335 - 810 | 940 | 830 | 729 | 114 | 45 | 334 | 113 | 140 | 322 | 2 |
| FFP2510A | 2500 | 500 | 335 - 910 | 1040 | 910 | 729 | 120 | 45 | 334 | 113 | 140 | 322 | 2 |
| FFP2511A | 2500 | 500 | 335-1020 | 1150 | 960 | 729 | 127 | 45 | 335 | 113 | 140 | 322 | 2 |
| FFP2512A | 2500 | 500 | 335-1105 | 1245 | 960 | 729 | 159 | 47 | 306 | 119 | 140 | 272 | 2 |
| FFP2514A | 2500 | 500 | 335-1260 | 1400 | 1050 | 729 | 171 | 47 | 305 | 119 | 140 | 272 | 2 |
| FFP3510B | 3500 | 500 | 365-960 | 1100 | 890 | 854 | 141 | 49 | 408 | 135 | 140 | 415 | 3 |
| FFP3511B | 3500 | 500 | 365-1010 | 1150 | 890 | 854 | 145 | 49 | 408 | 135 | 140 | 415 | 3 |
| FFP3512B | 3500 | 500 | 365-1105 | 1245 | 1090 | 854 | 152 | 49 | 409 | 135 | 140 | 415 | 3 |
| FFP3513B | 3500 | 500 | 365-1210 | 1350 | 1090 | 854 | 160 | 49 | 410 | 135 | 140 | 415 | 3 |
| FFP4911B | 4900 | 500 | 415-980 | 1150 | 850 | 954 | 227 | 55 | 409 | 145 | 160 | 365 | 3 |
| FFP4912B | 4900 | 500 | 415-1075 | 1245 | 900 | 954 | 238 | 55 | 408 | 145 | 160 | 365 | 3 |
| FFP4913B | 4900 | 500 | 415-1180 | 1350 | 970 | 954 | 250 | 55 | 407 | 145 | 160 | 365 | 3 |
| FFP4915B | 4900 | 500 | 415-1380 | 1550 | 1200 | 954 | 274 | 54 | 405 | 145 | 160 | 365 | 3 |
| FFP4916B | 4900 | 500 | 415-1490 | 1660 | 1260 | 954 | 286 | 54 | 403 | 145 | 160 | 365 | 3 |

Notes:

- Sideshifting stroke always 100 + 100 mm
- Pressure relief valve.

Forks are not included in the attachment price. Standard lift truck forks can be used without any modification.

Two hydraulic functions.

Special widths are available on request.

Flow divider valve is available on request.