

# Paper Roll Clamps

## Model LA-4



The Bolzoni Auramo LA-4 model paper roll clamps are designed for high volume paper handling in paper mills, harbors, paper warehouses and transport companies.

The clamps are designed for vertical handling of 2 - 4 paper rolls. Several model sizes available with a wide capacity and roll range choice.

Depending on the chosen model, the clamps are able to handle paper rolls from 5 000 kg up to 10 000 kg, with maximum paper roll diameter from 2 x 1150 mm up to 2 x 1830 mm.

Pivoting arm movement, with short and long arms provides wide roll range. Twin arm pairs enable the handling of two rolls side-by-side. Fixed short center arm.


Long arms are split to enable safe and non-damaging handling of two paper rolls on top of each other.

Several contact pad options available.



## Paper Roll Clamps

### Models LA-4

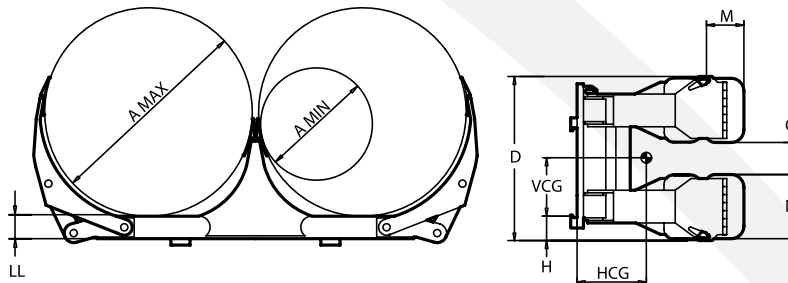

- Multiple Paper Roll clamp for vertical handling of 2-4 rolls at a time.
- Pivoting arm movement, equal length split long arms, fixed center arm. Several arm and contact pad options in standard series.
- Thin-arm profile ensures tight stacking with excellent visibility, and damage-free handling.
- Strong light body, with favorable effective thickness, maximizes the residual capacity of the truck.

Model	Capacity		Roll Range	Height	Weight	Center of Gravity		Effective Thickness	Contact Pads	Contact Pad Gap	Mounting Height	Mounting Class
	Q kg	BP mm				Center of Gravity Horizontal HCG mm	Center of Gravity Vertical VCG mm					
LA-500N-4	5000	650	2x[800-1300]	1040	865	330	410	160	240x400	200	①	4A
LA-600N-4	6000	650	2x[800-1300]	1040	1075	330	410	180	240x400	200	①	4A
LA-800N-4	8000	800	2x[900-1600]	1240	1290	350	545	180	280x500	200	①	②
LA-840N-4	8400	750	2x[900-1500]	1240	1280	345	545	180	280x500	200	①	②
LA-860N-4	8600	700	2x[900-1400]	1240	1270	340	545	180	280x500	200	①	②
LA-900N-4	9000	650	2x[900-1300]	1240	1250	330	545	180	280x500	200	①	②
LA-1000-4	10000	900	2x[1000-1800]	1240	1540	350	545	180	280x500	200	①	②
LA-1000S-4	10000	675	2x[650-1350]	1240	1320	340	545	180	280x500	200	①	②

One hydraulic function. Consult Bolzoni Auramo for hydraulic pressure and flow rate recommendations.

Special roll ranges on request. Separate sideshift and independent arm movement are available on request.

Standard contact pads: cast pad with high-friction surface. Contact pad options: steel-sprayed surface, polyurethane-faced, rubber-faced or flexible.

① Consult Bolzoni Auramo.

② Special mounting required.

**Note:** Also available with hydraulically adjustable frame width. Easy clamp width adjustment to varying paper roll diameter ranges.