

# Pulp bale clamps

## Model P



Bolzoni Auramo's P-series pulp bale clamps are designed for fast and safe handling of single, multiple and unitized pulp bales.

Typical applications are found in pulp mills, mill and commercial warehouses, stevedore dock operations, and the loading and unloading of other transportation links.

The P-series clamps have a capacity range from 8 to 12 tons, and can handle up to 6 pulp bale units (depending on the chosen model).

Welded, heavy duty frame comprises high-quality, precision-cut steel components. Open frame design offers good visibility for lift truck operators.

Extra strong, bolt-on arms with thin-profile design ensure fast, secure handling and precise knifing between bale units. Horizontal ribs provide a safe, tight grip for every lift. Clamp arm lengths and opening widths meet all handling requirements for rated weight capacities of P-series clamps.


Left-side arm pivots to compensate minor differences in bale sizes. Compact pivot design offers exceptional strength and service life.

Special steel arm carriers are protected by longlife steel bushings. Heavy-duty, large-port hydraulic systems ensure minimum pressure losses and fast, secure bale handling.



**BOLZONI**  
**AURAMO** 

## Pulp Bale Clamps / Model P

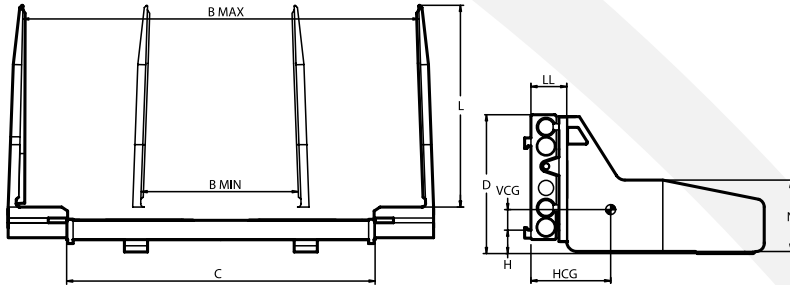

- Heavy-duty pulp-bale clamp.
- Bolted pulp-bale arms. Left arm pivoted.
- **Colourless arm finish.**
- Slim and strong arm design ensures easy knifing and tight stacking.
- Built-in integral sideshift improves positioning.

Model	Capacity kg	Load Centre mm	Opening Range B mm	Arm Length L mm	Arm Height N kg	Frame Width C kg	Height D mm	Weight kg	Centre of Gravity	Centre of Gravity	Effective Thickness LL mm	Mounting Height H mm	Mounting Class ISO 2328
									Horizontal HCG mm	Vertical VCG mm			
P-800-S	8000	800	600-3060	1400	450	2400	980	2755	254	①	290	①	①
				1600			2850	351	①	290	①	①	
P-800	8000	800	700-3260	1400	450	2400	980	2765	253	①	290	①	①
				1600			2850	350	①	290	①	①	
P-800-L	8000	800	600-3460	1400	450	2800	980	2880	245	①	290	①	①
				1600			2965	339	①	290	①	①	
P-800-LS	8000	800	700-3660	1400	450	2800	980	2910	243	①	290	①	①
				1600			2995	336	①	290	①	①	
P-800-LT	8000	800	600-3860	1400	450	3200	980	3065	234	①	290	①	①
				1600			3150	324	①	290	①	①	
P-800-LU	8000	800	700-4060	1400	450	3200	980	3090	232	①	290	①	①
				1600			3175	320	①	290	①	①	
P-1000	10000	800	730-3260	1400	415	2400	1090	3060	343	①	305	①	①
				1600			3090	354	①	305	①	①	
P-1000-L	10000	800	730-3660	1400	415	2800	1090	3224	330	①	305	①	①
				1600			3254	339	①	305	①	①	
P-1000-LS	10000	800	730-4060	1400	415	3200	1090	3415	316	①	305	①	①
				1600			3450	325	①	305	①	①	
P-1000-LT	10000	800	1100-4900	1400	415	3600	1090	3610	305	①	305	①	①
				1600			3660	315	①	305	①	①	
P-1200-LE	12000	800	2x[800-2900]	1600	900	4520	980	3900	310	①	290	①	①

Two hydraulic functions. Special opening ranges, arm lengths and arm finishes on request. External sideshift available. Independent arm movement extra. Arm lengths 1200 mm or greater, left arm is pivoted.

- ① Consult Bolzoni Auramo regarding factory specifications.
- ② These clamps (P-1200LE) have a center arm. Internal sideshift is not available.