




# Pulp bale clamps

## Model BC-PF

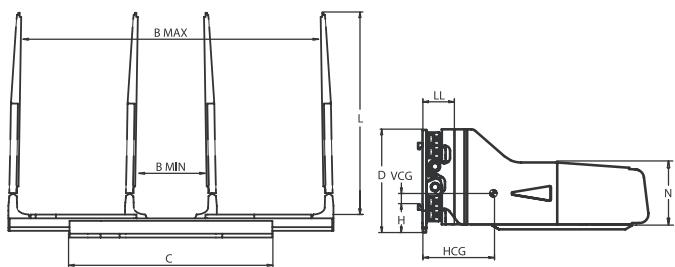

- Bale clamp for handling pulp bales
- Colourless arms welded directly to the arm carriers
- Extremely thin and light design with optimal visibility
- Steel profile frame, strong T-profile arm carriers
- Left arm pivoted
- Slim arm design
- Built-in integral sideshift

Model	Code	Capacity	Load centre	Opening range		Arm length	Arm height	Frame width	Height	Weight	Centre of gravity (horizontal)		Centre of gravity (vertical)		Effective thickness	Mounting height	Mounting
				B kg	L mm						HCG mm	VCG mm	LL mm	H mm	ISO 2328		
BC-50PF	12TH1	5000	800	630-2360	1200	490	1600	813	1230	294	314	190	80	4A			
BC-50PF	14TH1	5000	800	630-2360	1400	490	1600	813	1290	339	308	190	80	4A			
BC-50PF	16TH1	5000	800	630-2360	1600	490	1600	813	1360	386	301	190	80	4A			
BC-50PF	12TJ1	5000	800	730-2560	1200	490	1600	813	1230	294	314	190	80	4A			
BC-50PF	14TJ1	5000	800	730-2560	1400	490	1600	813	1295	338	308	190	80	4A			
BC-50PF	16TJ1	5000	800	730-2560	1600	490	1600	813	1360	385	301	190	80	4A			
BC-50PF	12VH1	5000	800	630-2560	1200	490	1800	813	1260	288	315	190	80	4A			
BC-50PF	14VH1	5000	800	630-2560	1400	490	1800	813	1325	331	309	190	80	4A			
BC-50PF	16VH1	5000	800	630-2560	1600	490	1800	813	1390	378	303	190	80	4A			
BC-50PF	12VJ1	5000	800	730-2760	1200	490	1800	813	1265	287	315	190	80	4A			
BC-50PF	14VJ1	5000	800	730-2760	1400	490	1800	813	1330	331	309	190	80	4A			
BC-50PF	16VJ1	5000	800	730-2760	1600	490	1800	813	1395	377	303	190	80	4A			

**BOLZONI**  
**AURAMO**

**AURAMO OY**  
P.O.Box 78  
01511 Vantaa  
FINLAND  
tel: +358-9-82931  
fax: +358-9-8701037

[www.bolzoni-auramo.com](http://www.bolzoni-auramo.com)

e-mail: [sales.fi@bolzoni-auramo.com](mailto:sales.fi@bolzoni-auramo.com)